


| REV | DESCRIPTION | DATA | APPD |
|-----|-------------|------|------|
| A | | | |

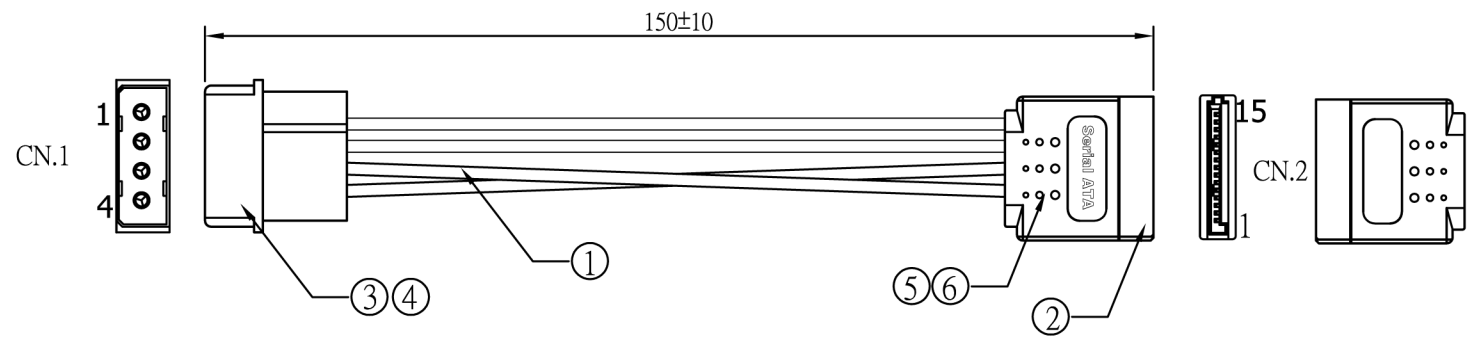

CONNECT SHEET

ELECTRICAL SPECIFICATION:
 1.OPEN/SHORT/INTERMITTENCE
 100%Testing Line-Process.
 2.Insulation resistance:20MΩ.
 3.Hi-voltage test:DC-300V/0.1Sec.
 4.Conductive resistance:1Ω.

| | | | | | | | | | | | | | | | |
|-------|------|---|---|-------|---|---|-----|---|---|-------|----|----|--------|----|----|
| CN.1 | ---- | | | 3 | | | 4 | | | 2 | | | 1 | | |
| CN.2 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| COLOR | ---- | | | BLACK | | | RED | | | BLACK | | | YELLOW | | |

| ⑥ | 4g | PE | PE WHITE |
|------|-----|----------|---|
| ⑤ | 8g | PVC | 45P PVC COLOR:BLACK(WG-BK01). |
| ④ | 4 | TER | POWER 4PIN WITH FEMALE,TIN PLATED MALE TER |
| ③ | 1 | HOUSING | POWER 4PIN FEMALE .PITCH:5.08mm |
| ② | 1 | CONN | Serial ATA 15PIN FEMALE BLACK INSULATOR PIN GOLD PLATED G/F |
| ① | 4 | WIRE | UL1007 18AWG WIRE(COLOR:BLACK、RED、YELLOW). |
| ITEM | QTY | PARTNAME | DESCRIPTION |

| | | | | |
|--|-------------------------|---------------------|---------------|--------------------------|
| TOLERANCES X ± .X ± .XX ± .XXX ± X* ± .X* ± | APPROVED: | DATE: | MAT P/N: | C-SATA-PWR |
| | CHECKED: | DATE: | CUSTOMER P/N: | S-ATA-PWR |
| | DRAWN: chenwenqi | DATE: 2006.10.13 | DESCRIPTION: | S ATA 15PIN/POWER 4P HSG |
| | SCALE: NONE | UNIT: mm | DWG.NO: | WG-0345 |
| | SPECIFICATION USED ONLY | | SHEET:1 OF 1 | REV:A |