


RoHS Compliant


REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

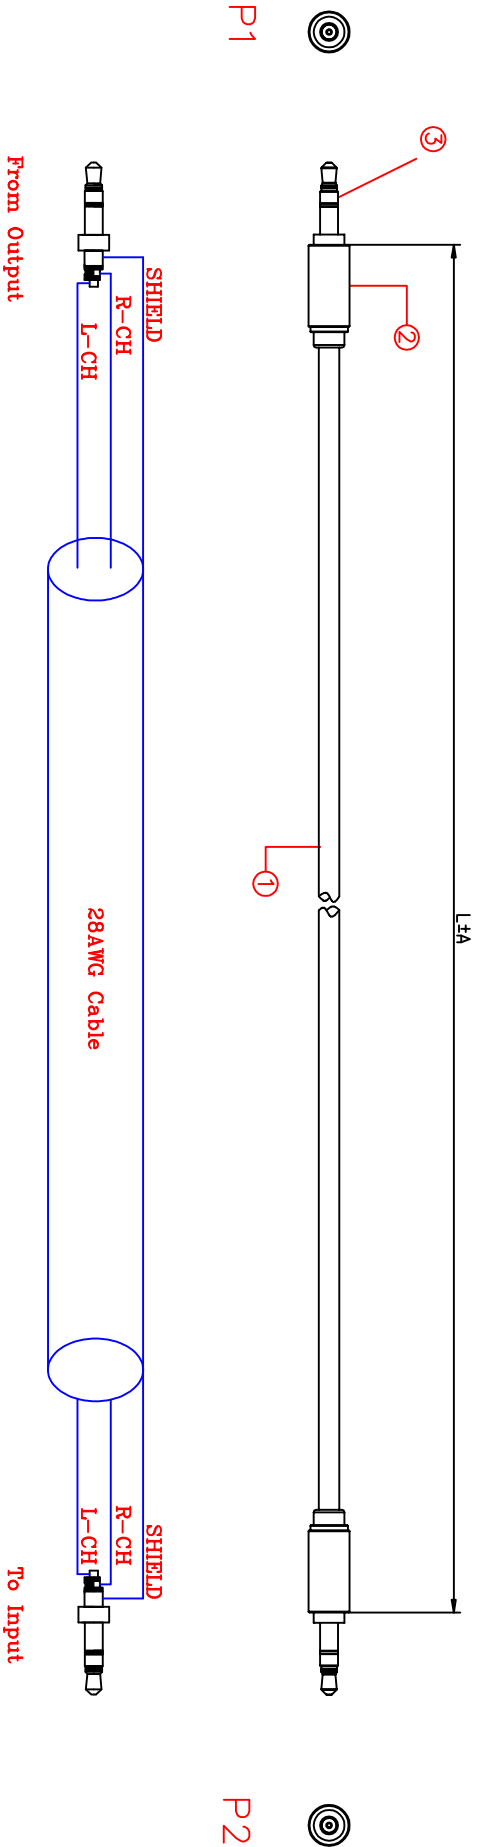

Electrical character:

- a. 100% open & short testing.
- b. Withstanding voltage: DC 300V 0.01Sec.
- c. Insulation resistance: 10M Ohm(Min).
- d. Conductive resistance: 2 Ohm(Max).

L(mm)	A(mm)

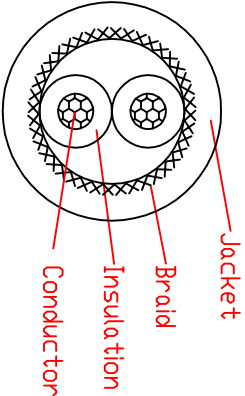

CABLE SPECIFICATION:

28AWG Cable/Ø:4.0mm/BK
10/0.10BC*2C+AL+64#/0.10BC

NO.	PART NAME	SPEC DESCRIPTION		REMAKE
		TOLERANCE UNSPECIFIED		
1	CABLE	28AWG Cable/Ø:4.0mm/BK 10/0.10BC*2C+AL+64#/0.10BC		
2	OVERMOLD	PE LOW DENSITY BLACK		
3	CONNECTOR	Plug GOLD PLATED		
4				
5				
6				

INNERMOLD		TOLERANCE UNSPECIFIED	
OVERMOLD			

DRAWN: Zhong		NAME	
2012/11/30		Zhongshan Jiehua	
DESIGNER:		Electronics Technology Co., Ltd.	
CHECKED: KHS			
APPROVED: Dived			

3.5mm cable Male to Male		SHEET	
DRAWING NO. 180-180		1/1	
		REV 0.1	