REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD

RoHS Compliant

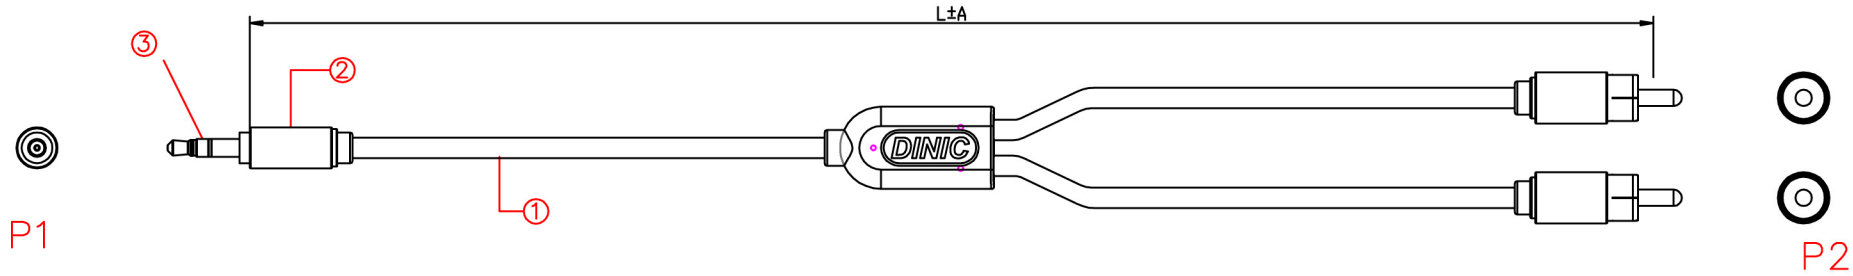

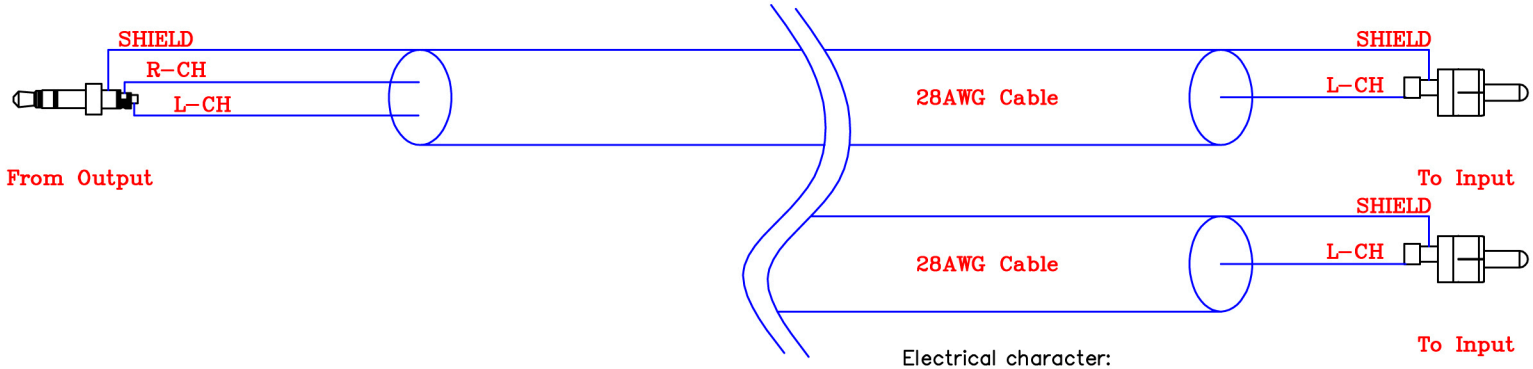

Electrical character:

a. 100% open & short testing.
b. Withstanding voltage: DC 300V 0.01Sec.
c. Insulation resistance: 10M Ohm(Min).
d. Conductive resistance: 2 Ohm(Max).

L(mm)	A(mm)

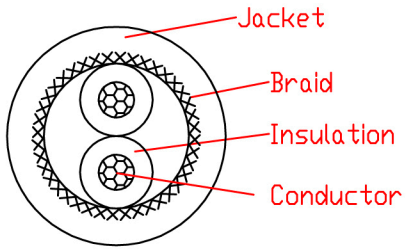

CABLE SPECIFICATION:

28AWG Cable/□D:4.0mm/BK
10/0.10BC*2C+AL+64#/0.10BC

NO.	PART NAME	SPEC DESCRIPTION	REMAKE
3	CONNECTOR	Plug GOLD PLATED	
2	OVERMOLD	PE LOW DENSITY BLACK	
1	CABLE	28AWG Cable/□D:4.0mm/BK 10/0.10BC*2C+AL+64#/0.10BC	

INNERMOLD

OVERMOLD

TOLERANCE UNSPECIFIED
ANGLE ±

DRAWN: zhang 2012/11/30
DESIGNER:
CHECKED: Kris
APPROVED: Dived

MO-K2C

SCALE NON
UNIT mm

NAME: 3.5mm cable Male to 2*RCA Male cable

SHEET 1/1

DRAWING NO. 180-180

REV 0.1