REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD

RoHS Compliant

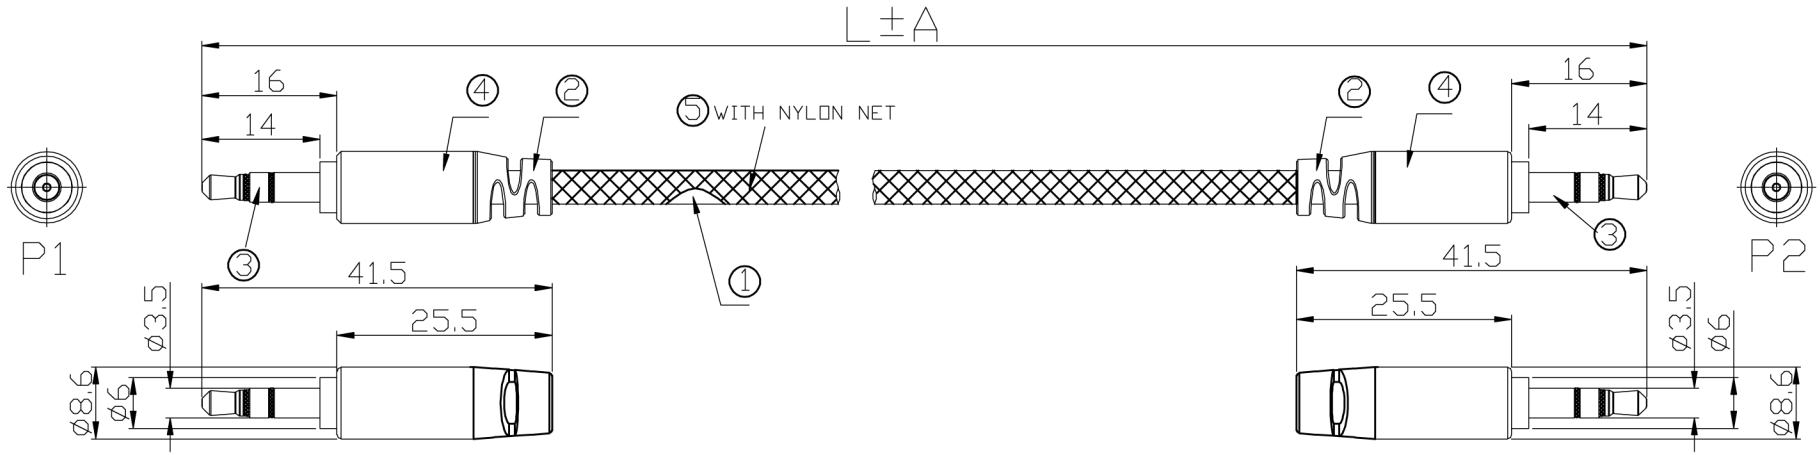



L(mm)	A(mm)
5000	±50
2000	±30
1000	±30
500	±20

PIN ASSIGNMENT

P1 3.5MALE		P2 3.5MALE
(WHITE)1	———	1(WHITE)
(RED)2	———	2(RED)
(DRIAN)3	———	3(DRIAN)

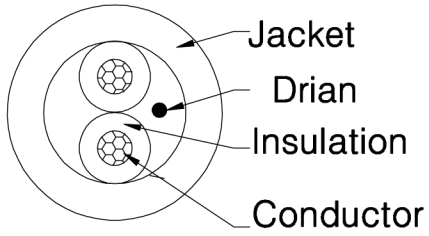

CABLE SPECIFICATION:

28AWG Cable/□D:3.0mm/BK
10/0.10BC*2C+7/0.12BC+AL

NO.	PART NAME	SPEC DESCRIPTION	REMAKE
6			
5	BRAID NET	NYLON BRAID NET	
4	HOUSING	Copper Metal shell	
3	CONNECTOR	Plug MALE GOLD PLATED	
2	OVERMOLD	PVC 45P	
1	CABLE	28AWG Cable/□D:3.0mm/BK 10/0.10BC*2C+7/0.12BC+AL	

INNERMOLD

OVERMOLD

TOLERANCE UNSPECIFIED
.° ° ° ±
.° ° ±
.° ±
. ±
ANGLE ±

SCALE NON | UNIT mm

DRAWN: wang 2015-12-30
DESIGNER:
CHECKED: Kris
APPROVED: Dived

NAME: 3.5mm cable Male to Male [180° -180°]

型号: DU-KK-05/1/2/5

SHEET 1/1

REV 0.1