


WEIGHT	CUSTOMER NO:	REMARK
38g		

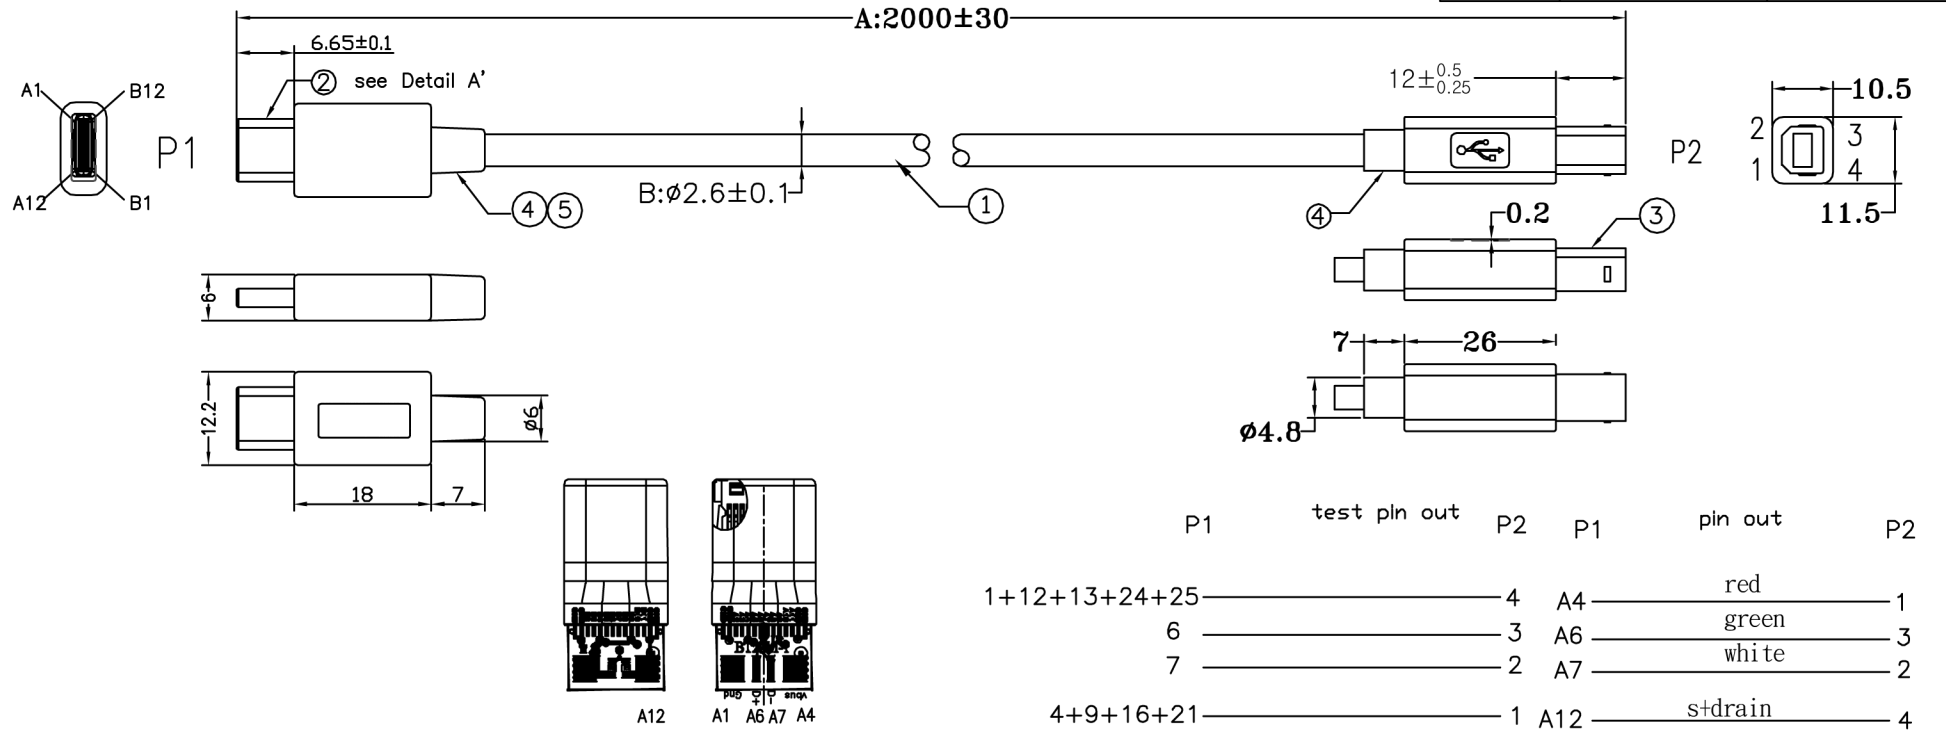

NOTE:

- 1) PRIMARY DIM:A, B
- 2) DIE NO P1:IU04227.OU04227. DIE NO P2:IU04238,OU04238
- 3) P1side A1+B1+A12+B12及A4+B4+A9+B9 plug short out
- 4) ELECTRICAL TEST:
 1. SHORT AND OPEN 100% TESTING
 2. CONDUCTOR RESISTANCE 3Ω
 - 5) RoHS compliant .

4	OUTER JACKET PVC 45Pa WHITE(1927)
3	USB B TYPE 4P MALE WHITE SOLDER TYPE (RoHS)
2	USB 2.0 C/M blackPIN G/F shell nickel plated W/PCB FOR USB2.0 C/A,B,MICRO (CC(A5)-5.1Kohm-GND) shell seamless
1	NO-UL 32#2C+22#1C+D+A+S OD:2.6 WHITE(1927) TPEconductor : tinned copper 4M RoHS

A	FIRST EDITION	ZP	2017/5/19
REV. ECR	DESCRIPTION	C.N.	DATE
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</small>			
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</small>		TITLE USB2.0 Type C TO B Plug CABLE WHITE 2M	
DIMENSIONS	TOLERANCE	CHKD.	CONF.
0.00 TO 30.00mm	±0.10mm		
30.01 TO 80.00mm	±0.13mm	DR.	APPD.
80.01 TO 150.00mm	±0.15mm	ZP	
150.01mm	±0.20mm	PART NO.	55340032
MATERIAL		SCALE	SHEET 1/1 UNIT MM SIZE A4 REV. A
FINISH			