




1m

REVISION CONTROL

REV	DECS	DATE	ECN NO.

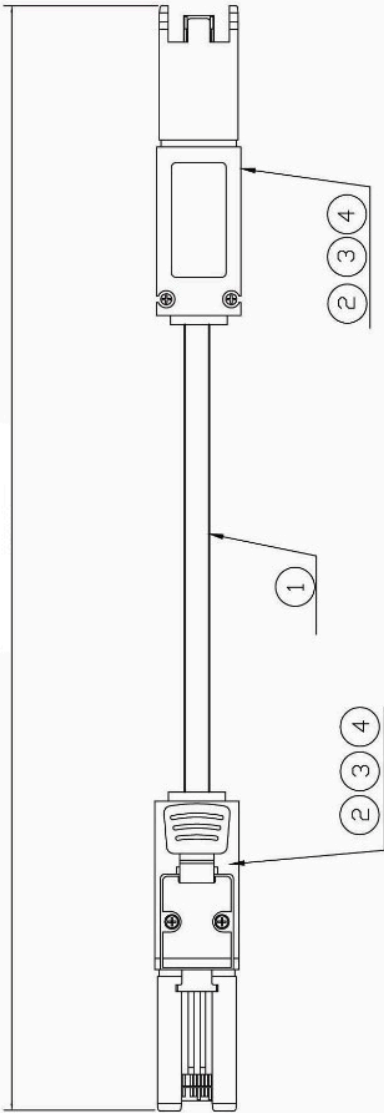

P1		P2	
A1	B1		
A2	B2		
A3	B3		
A4	B4		
A5	B5		
A6	B6		
A7	B7		
A8	B8		
A9	B9		
A10	B10		
A11	B11		
A12	B12		
A13	B13		
B12	A12		
B11	A11		
B10	A10		
B9	A9		
B8	A8		
B7	A7		
B6	A6		
B5	A5		
B4	A4		
B3	A3		
B2	A2		
B1	A1		

ROHS COMPLIANT

ELECTRICAL TEST:
 1.OPEN / SHORT 100% TEST.
 2.CONTACT RESISTANCE : 1Ω(MAX).
 3. INSULATION RESISTANCE : 20MΩ (MIN).
 4.HI-POT : DC 300V /10MS.

INNER MOLDING	
OUTER MOLDING	7096030

ITEM:	SATA0000001625
DRAWN BY:	鐘有清
CHECKED BY:	
APPROVED BY:	
SCALE:	NONE
CUSTOMER:	C127
CUSTOMER P/N:	
DATE:	2007-06-30
PAGE:	1/1

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
3	3-02-0002-086701	TRL-THERMELT-867	2	PCS
4	2-70-0004-011501	MINI SAS 26P CONNECTOR	2	SET
3	2-70-0002-011501	MINI SAS 26P ZINC ALLOY SHELL NICKEL PLATED	500	mm
2	1-67-0001-200201	[(28AWG*2P+FILLER+BINDE)+6P*28AWG]+BINDER+AL.ML+BRAID+JACKET		
1				

ALL DIMENSIONS IN mm (UNLESS OTHERWISE SPECIFIED)