





5	6	7
WEIGHT	CUSTOMER NO:	REMARK
24g-K1	USB-II-2R	MAG

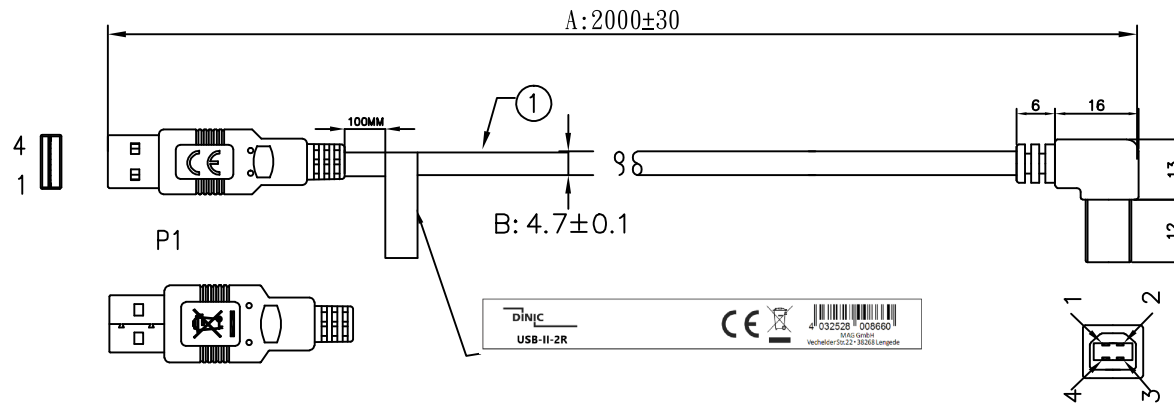

MAG part No:
USB-II-2R

PINOUT:

P1

P2

1 RED

2 ——— 2 WHITE
3 ——— 3 GREEN

4 BLACK 4

SHELL BRAID SHELL

NOTE:

1) PRIMARY DIMENSION: A B

2) ROHS COMPLIANT.

5	INNER JACKET PE (RoHS)
4	OUTER JACKET PVC 60Pa CLEAR(2101) (RoHS)
3	USB2.0 B/M 4P WHITE SOLDER TYPE SHORT BODY (RoHS)
2	USB2.0 A/M 4P WHITE SOLDER TYPE (RoHS)
1	USB2.0 28#1P+24#2C+A+B(65%)+D OD:4.7MM CLEAR(2101) 2020MM ROHS

A	FIRST EDITION	CY	2024/05/06			
REV.	ECR	DESCRIPTION	C.N.	DATE		
		HB				
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		TITLE USB2.0 CABLE				
DIMENSIONS		TOLERANCE				
0.00 TO 30.00mm		±0.10mm				
30.01 TO 80.00mm		±0.13mm				
80.01 TO 150.00mm		±0.15mm				
150.01mm		±0.20mm				
MATERIAL		MATERIAL				
FINISH		FINISH				
SCALE		SHEET		UNIT	SIZE	REV.
1:1		1/1		MM	A4	A