REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD

RoHS Compliant

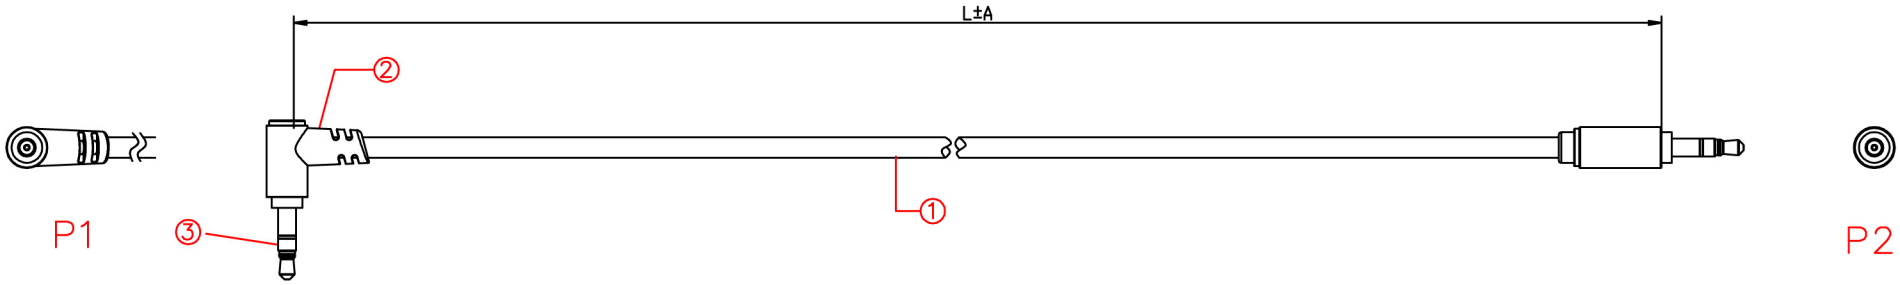

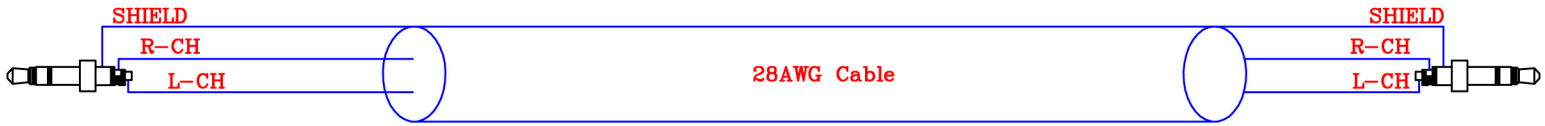

From Output

To Input

Electrical character:

a. 100% open & short testing.
b. Withstanding voltage: DC 300V 0.01Sec.
c. Insulation resistance: 10M Ohm(Min).
d. Conductive resistance: 2 Ohm(Max).

L(mm)	A(mm)

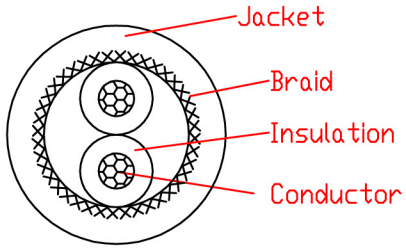

CABLE SPECIFICATION:

28AWG Cable/□D:4.0mm/BK
10/0.10BC*2C+AL+64#/0.10BC

NO.	PART NAME	SPEC DESCRIPTION	REMAKE
6			
5			
4			
3	CONNECTOR	Plug GOLD PLATED	
2	OVERMOLD	PE LOW DENSITY BLACK	
1	CABLE	28AWG Cable/□D:4.0mm/BK 10/0.10BC*2C+AL+64#/0.10BC	

INNERMOLD	TOLERANCE UNSPECIFIED ANGLE ±	MO-KKL	
		SCALE NON	UNIT mm
□VERMOLD	DRAWN: zhang 2012/11/30	NAME 3.5mm cable Male to Male [90° /180°]	SHEET 1/1
	DESIGNER:		
	CHECKED: Kris	DRAWING NO. 180-180	REV 0.1
	APPROVED: Dived		