


RoHS Compliant

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------


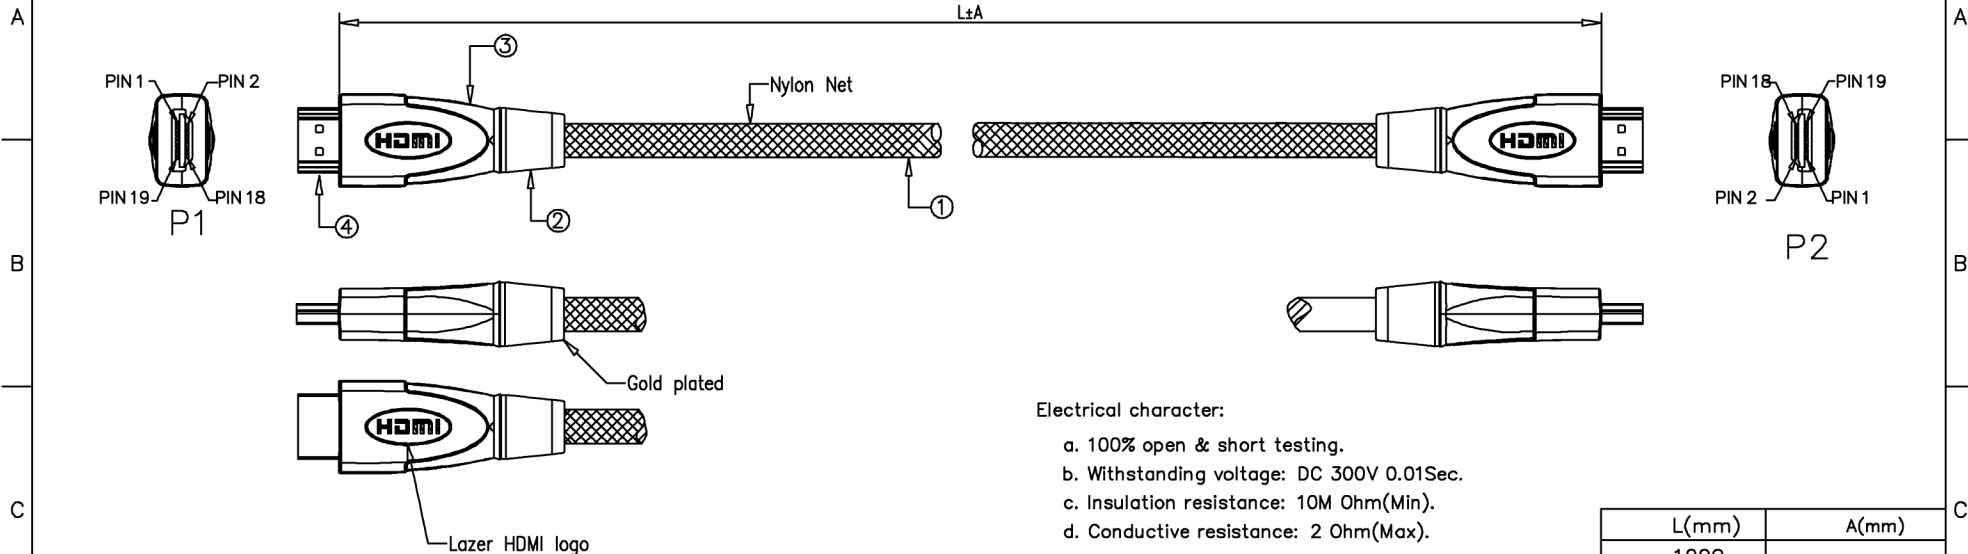


Electrical character:

- a. 100% open & short testing.
- b. Withstanding voltage: DC 300V 0.01Sec.
- c. Insulation resistance: 10M Ohm(Min).
- d. Conductive resistance: 2 Ohm(Max).

L(mm)	A(mm)
1000	
2000	
3000	
5000	

PIN Assignment

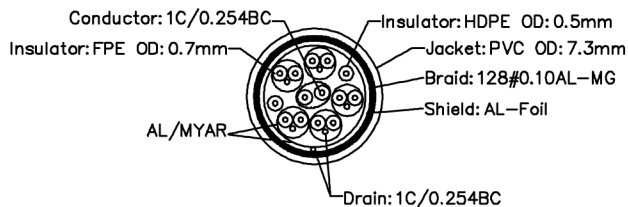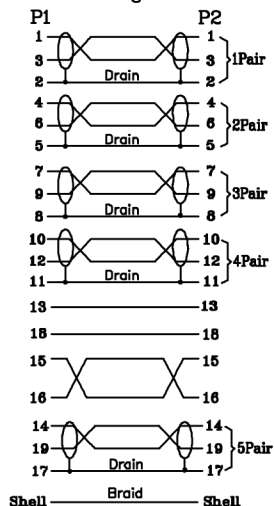

CABLE SPECIFICATION:
 30AWG 1.4A HDMI Cable/OD: 7.3mm/BK
 {[(1C/0.254BC+FPE OD: 0.7mm)*1P
 +(1C/0.254C+MYAL) *5P
 +(1c/0.254BC+HDPE OD: 0.5mm)*4C+TISSUE
 +AL+1C/0.254BC+128#/0.1AL/MG]+PVC OD: 7.3mm}

6				
5				
4	CONNECTOR	HDMI MALE GOLD+PLASTIC CAPS		
3	INNERMOLD	PE LOW DENSITY+Copper Tape		
2	CONNECTOR	HDMI Metal Housing: Zinc Alloy with gun colour shinning Plated		
1	CABLE	30AWG 1.4A HDMI Cable/OD: 7.3mm/BK {[(1C/0.254BC+FPE OD: 0.7mm)*1P +(1C/0.254C+MYAL) *5P +(1c/0.254BC+HDPE OD: 0.5mm)*4C+TISSUE +AL+1C/0.254BC+128#/0.1AL/MG]+PVC OD: 7.3mm}		
NO.	PART NAME	SPEC DESCRIPTION	REMAKE	
	INNERMOLD	TOLERANCE UNSPECIFIED		
		±		
		±		
		±		
		±		
		ANGLE		
	OVERMOLD	DRAWN: <i>[Signature]</i>		
		2011/08/14		
		DESIGNER:		
		CHECKED: Kris		
		APPROVED: Dived		
			SCALE	UNIT
			NON	mm
			NAME	SHEET
			DU-HDMI-1/2/3/5/10	1/1
			DRAWING NO.	REV
			2103-A	0.1