



外箱標籤:每箱貼一張

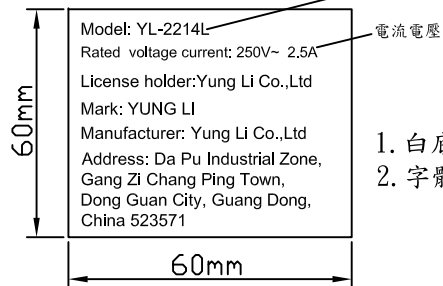

產品型號




電流電壓

1. 白底黑字
2. 字體: Arial

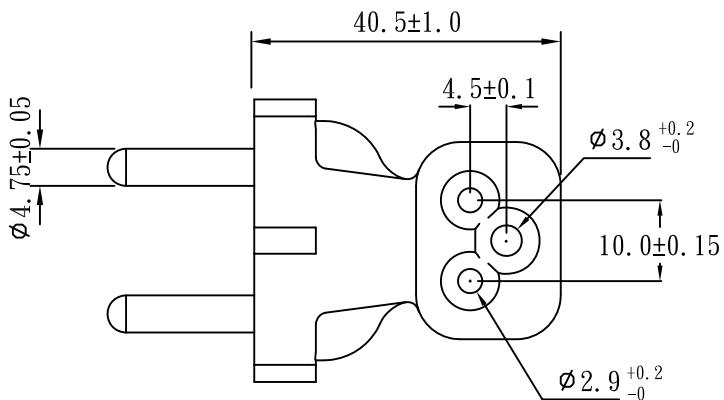


Note:

1. Rating: 2.5A 250V~
2. Insulation Resistance: 100MΩ
3. Dielectric Voltage: 2000V/sec

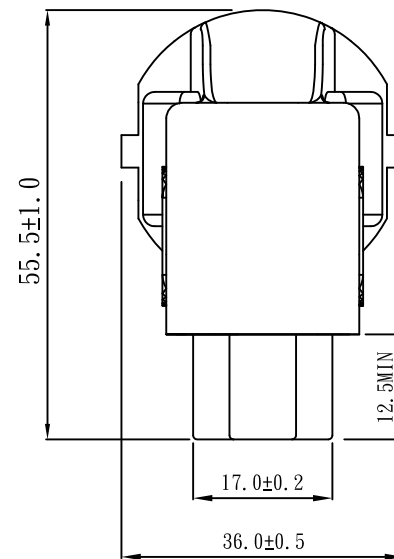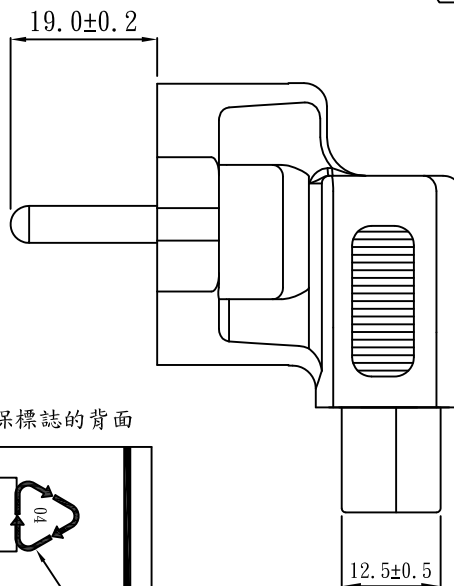
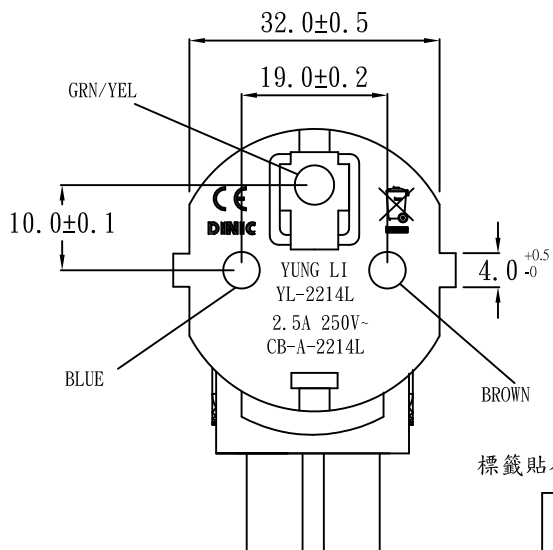


標籤貼在環保標誌的背面



BLACK LOGO

袋子標籤:每袋一張

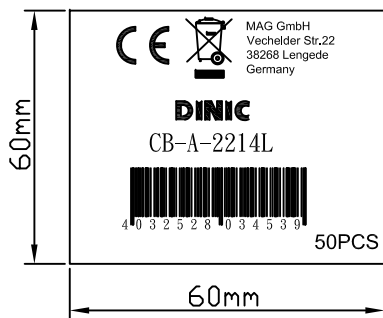

Sample Drawing No.:  
 SP210308-01

Tolerance >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	Approved		Date		YUNG LI CO., LTD.			
	Checked		Date					
	Drawn	SUKI	Date	23.04.19	Customer	MAG		
	Cat. No.	YL-2214L			P/N.	CB-A-2214L		
	Drawing No.	CY-A2214L-04	Rev.	C	Material	P.V.C	Unit	mm
				HEFT(g)				