
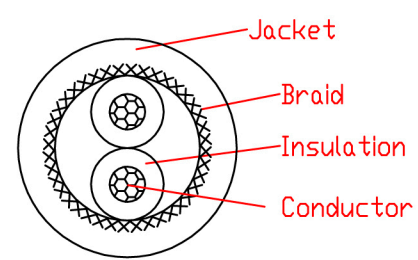


RoHS Compliant

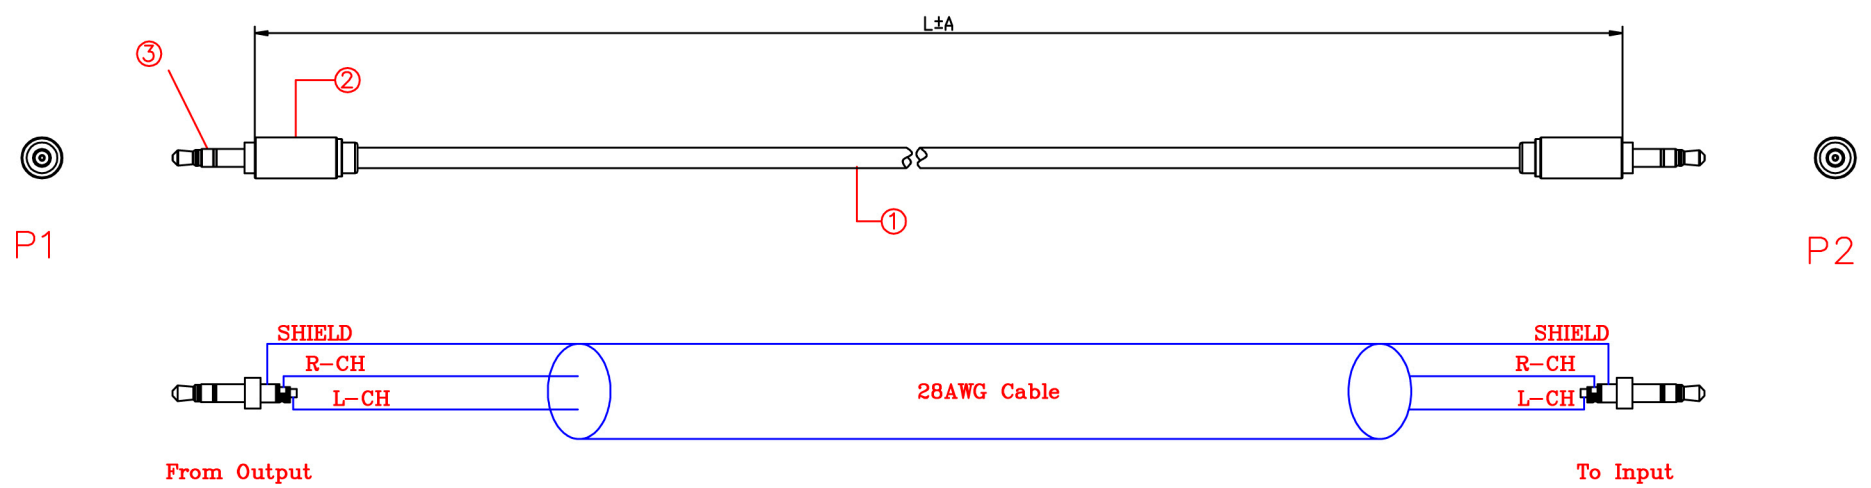

CABLE SPECIFICATION:
28AWG Cable/ØD:4.0mm/BK
10/0.10BC*2C+AL+64#/0.10BC

Electrical character:		L(mm)	A(mm)
a. 100% open & short testing.			
b. Withstanding voltage: DC 300V 0.01Sec.			
c. Insulation resistance: 10M Ohm(Min).			
d. Conductive resistance: 2 Ohm(Max).			
6			
5			
4			
3	CONNECTOR	Plug GOLD PLATED	
2	OVERMOLD	PE LOW DENSITY BLACK	
1	CABLE	28AWG Cable/ØD:4.0mm/BK 10/0.10BC*2C+AL+64#/0.10BC	
NO.	PART NAME	SPEC DESCRIPTION	REMAKE
INNERMOLD		TOLERANCE UNSPECIFIED	MO-KK
		ANGLE	
OVERMOLD		DRAWN: zhang	SCALE NON UNIT mm
		DESIGNER:	NAME
		CHECKED: Kr/s	3.5mm cable Male to Male
		APPROVED: Dived	DRAWING NO. 180-180
			SHEET 1/1
			REV 0.1