



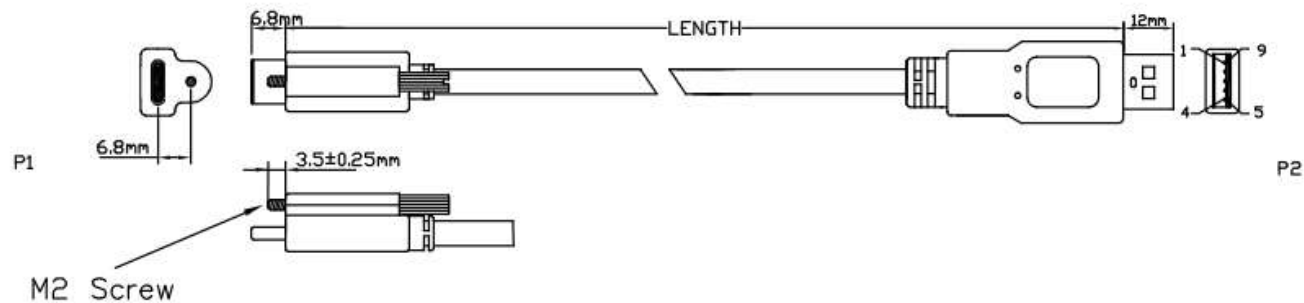

Customer NO:	LENGTH
	500±20MM
	1000±30MM
USBC-CSA-2SPB	2000±50MM

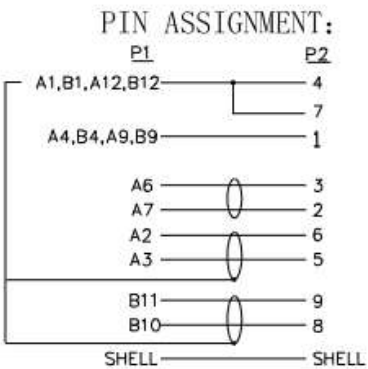

NOTES:

- 1) PRIMARY DIM: A,B,C,D
- 2) ROHS/REACH COMPLIANT

4	OUTER JACKET PVC BLACK ROHS/REACH
3	USB3.0 AM BLUE SOLDER SHELL PLATED NI ROHS/REACH
2	USB3.1 C/M WHITE SOLDER TYPE SHELL PLATED NI ROHS/REACH
1	USB3.0 30AWG(1P+A+D)*2+30AWG1P+24AWG2C+A+B+D PVC, 0 D:4.5MM BLACK ROHS COMPLIANT

A		FIRST EDITION	ZRQ	2025/02/06
REV.	ECR	DESCRIPTION	C.N.	DATE
MAG GmbH				
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		TITLE USB 3.0 A/M TO TYPE C		
DIMENSIONS		TOLERANCE	CHKD.	CONF.
0.00 TO 30.00mm		±0.10mm		
30.01 TO 80.00mm		±0.13mm		
80.01 TO 150.00mm		±0.15mm		
150.01mm		±0.20mm		
MATERIAL		PART NO.	K65USB3AMCM1BKXX	
FINISH		SCALE	1:1	SHEET 1/1
		UNIT	MM	SIZE A4
		REV.	A	