



VERSION	DESCRIPTION	DATE
1.0	New Release	2023/6/19

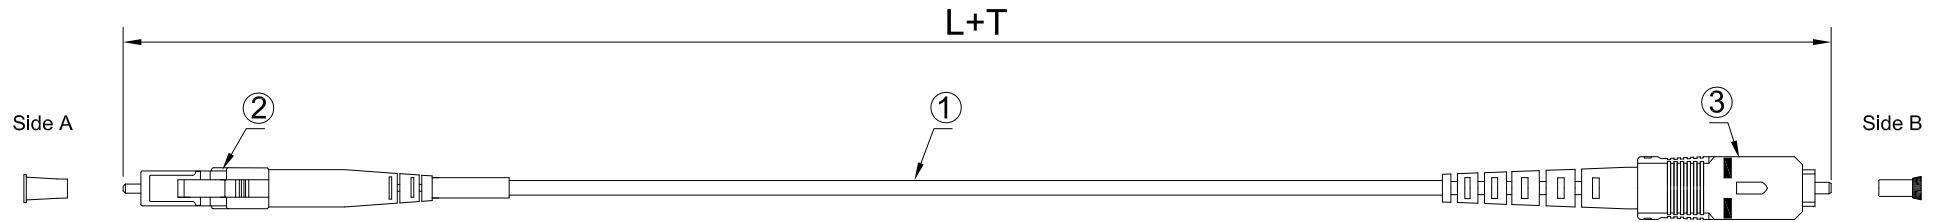

L	T
L<1M	+50/-0 mm
1M≤L<5M	+100/-0 mm
5M≤L<10M	+100/-50 mm
L≥10M	±1%*L

Cross-Section(8:1):

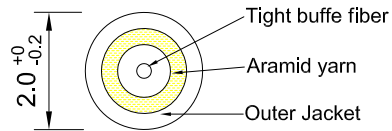


Notes:

- (1) Insertion loss(IL) ≤ 0.3 dB
Return loss(RL) ≥ 65 dB
- (2) All materials are complied with RoHS directive

MAG GmbH

6									
5									
4									
3	SC/APC 8° 2.0mm Simplex Connector (Green housing, Green boot)								
2	LC/APC 8° 2.0mm Simplex Connector (Green housing, Green boot, Yellow heat shrink tube)								
1	2.0mm, Simplex, SM-9/125, G652D LSZH, Optical Fiber Cable(White)								
No.	Description								



UNIT mm
 unless otherwise stated
 Tolerances
 mm XXX.XX ±0.3
 XX.XX ±0.2
 X.XX ±0.1
 angular ±2°

TITLE		LC/APC-SC/APC,SM Simplex, 2.0mm,LSZH White, xxm			
UNIT	mm	P/N	xxx	DRAWN BY	Key
Customer P/N		LWR-LCA-SCA-x	CHECK BY		
SIZE	A4	SCALE	Free	PAGE	1/2
APPROVAL BY					