
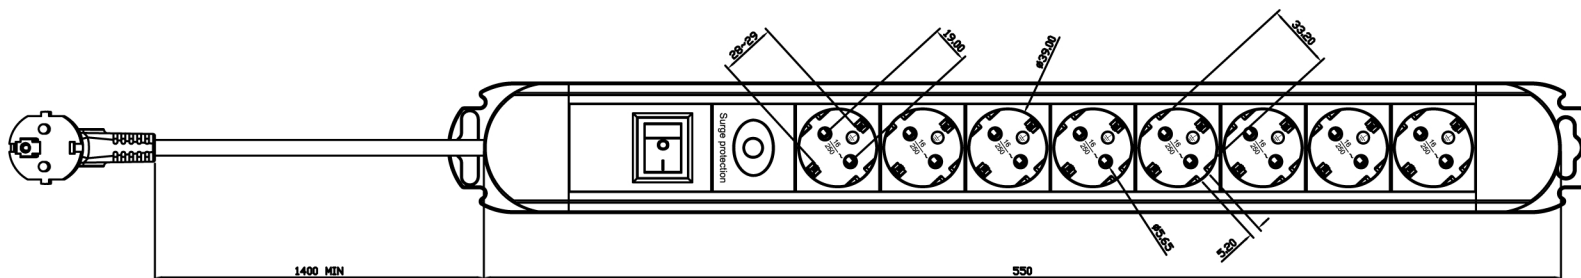
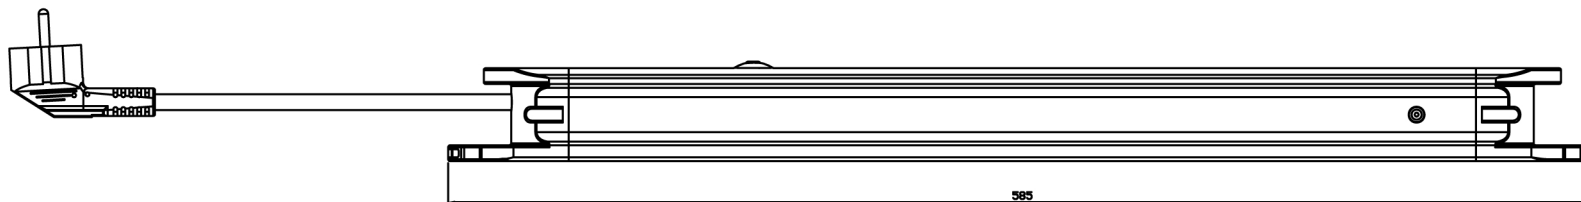


DWG NO.


FRWGKS08

版本 / Revision		日期 / Date
版本 / Rev.	叙述 / Description	日期 / Date
A	初次发布 / Initial release	02/06-2015

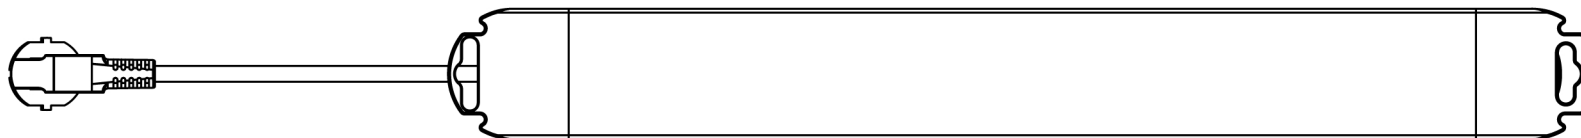

- Notes:
- 8 ways Germany socketoutlet: 16A 250V ~, 3680W
  - 1, Switch Rating: 16A 250V ~
  - 2, PCBA inside with Surge protecting Type 3, Uc=230V~, Uoc=3000V, (For L-N, L/N-PE) Uop=1000V, (For L-N, L/N-PE), Maximum energy: 300Joules
  - 3, Cable: H05VV-F 3X1.5mm<sup>2</sup> 1.5M
  - 4, Material of chunnel profile: Aluminum
  - 5, Material of plastic housing: PP, GWT 750°C

CE & RoHS Compliant



普通公差  
Unless Otherwise Special  
X. ±0.3  
X.X ±0.2  
X.XX ±0.1

单位 Unit	比例 Scale	页次 Sheet	图幅 Paper
mm	1:1	1 of 1	A4

制图 Drawing	XB_Liu
审核 Check	GM_Zhang
核准 Approval	Lucy_Zheng

成品图  
Finished Product Drawing

型号 Part No.  
名称 Titel

STT-8U  
8 Schuko Power Strip  
with OVP

**MAG**